



ASSEMBLY INSTRUCTIONS


REFER TO IMAGES AND
ASSEMBLY DIAGRAM ON REVERSE




1. Remove old Igloo® Spigot




2. Wash Hands




3. Unscrew threaded cap from pump assembly




4. Separate the pump assembly by carefully pulling piston from tube




5. Remove collar from pump assembly




6. Place pump assembly through opening in cooler from inside




7. Carefully replace collar, applying pressure from both inside & out




8. Carefully insert piston rod assembly into pump unit




9. Thread the threaded cap (be sure not to cross-thread) onto assembly and hand tighten




10. Use wrench to tighten




11. Remove plastic wrap from cartridge, and install tube on to cartridge as shown



12. Install tube on to pump inlet



13. Fill cooler with approximately 4-5 inches of water



14. Hold cartridge under water while pumping, until water begins coming out of the pump.


NOTE: First water from new cartridge will appear gray. This is normal and only a result of the manufacturing process. This will only last for first few pumps.



15. Place ice guard over cartridge and pump, and plastic tube guard over plastic tube

System is ready for use

ASSEMBLY BREAKDOWN

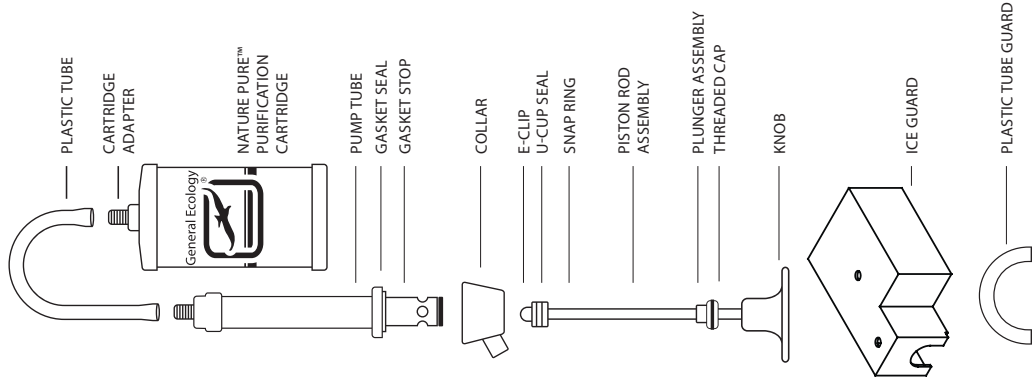

ASSEMBLY INSTRUCTIONS

Standard Golf Water Cooler Purification System

Part No. 49000

CAUTION

Do **NOT** attempt to install this system without carefully reading the enclosed instructions.

Failure to do so may result in damaging critical seals in the pump assembly or voiding the warranty.

